


Quality Aluminum Registers • Grilles • Louvers



- 1 Aluminum construction, rustproof and only 40% weight versus steel.
- 2 Powder coated superior painted finish has frames protected by an easily removable poly film. Finishes include white, silver, brown or mill. Check submittal drawing for availability.
- 3 Quality roll formed blades are designed for optimal performance, strength and appearance. Blades are easy adjusting, rattle-free and will not loosen due to our nylon pin mounting.
- 4 Solid extruded mullions are used to ensure a strong quality product on larger sizes.
- 5 Countersunk screw holes provide pleasing appearance and ease of installation.
- 6 Mechanically Locked Corners provide hairline joint.
- 7 One piece extruded register frame provides a superior quality product.
- 8 Sponge gaskets are provided on all supply grilles and registers to prevent streaking of walls or ceilings.
- 9 Our opposed blade damper features our nylon operator which is easily operated by any slender tool.

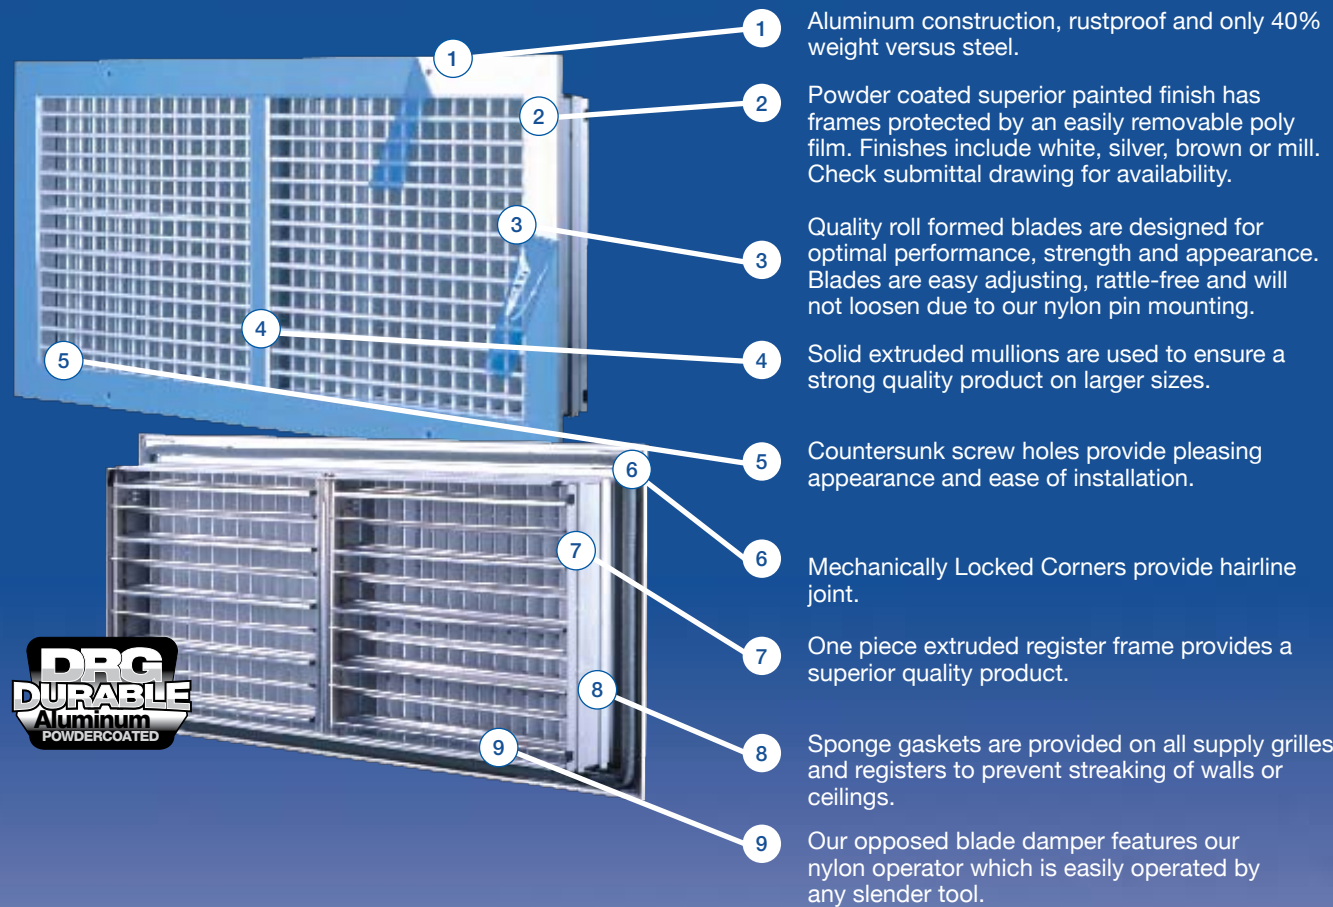

DRG

Dayus Register & Grille

Faster Delivery!



3 DAY SHIP GUARANTEED

Faster if required... Just Call

Available on Any size, Any model.

FRIDAY NEXT GUARANTEED

Save up to 15% on your order.

If ordered Monday through Saturday, DRG will ship by the following Friday or sooner.

STANDARD DELIVERY

Save up to 36% on non-urgent orders.

Approximately 2-3 weeks delivery.

CUSTOMER SATISFACTION GUARANTEED!

DRG

Dayus Register & Grille

5290 Pulleyblank St., RR#1 Windsor, ON N9A 6J3
 Phone: 519-737-1199 • Fax: 519-737-1831
www.dayus.com

3 DAY SHIP GUARANTEED


FASTER IF REQUIRED... JUST CALL

Supply



- Individually adjustable semi airfoil rollformed blades on 2/3 inch centers
- Single or double deflection providing vertical and horizontal directional air control
- Pressure fit nylon pivot pins provide rattle-free, easy to adjust blades that will not loosen
- Opposed blade damper or multi-shutter damper available

Return

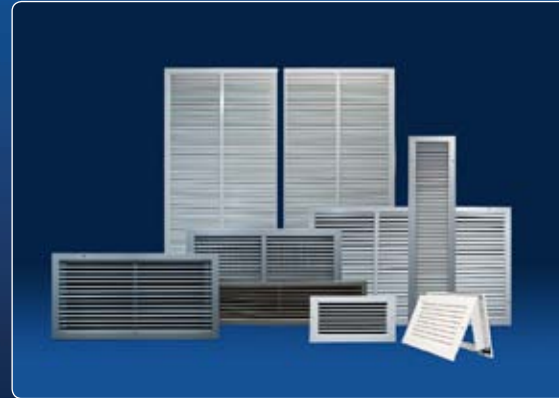

- Economical rollformed blades, or stronger extruded blades can be specified
- 30 or 45 degree fixed blade provide vision proof appearance
- Zero degree available to provide higher free area
- Rattle free blades available on 2/3" or 1" spacing, provide stylish look
- Transfer door grilles with V blade design and auxiliary frame
- Opposed blade damper available

Curved Blade



- Available in eight different directional throw versions to meet your air diffusion needs
- One, two, three or four way air patterns
- Wider spread of air can be achieved
- Standard model has individually adjustable blades at face of grille
- Options include a recessed adjustable blade or fixed blade installation
- Opposed blade damper or multi-shutter damper available


Bar Linear



- Features fully extruded aluminum construction
- Provides a neat, expensive-looking, stylish appearance
- Deflection bars are fixed parallel to the long dimension
- Core style options include 0, 15, 30 degree deflection, pencil-proof or fine line appearance
- Installed in ceilings, side walls, sills or floor where a straighter, longer air throw is required
- Opposed blade damper available



Cube Core

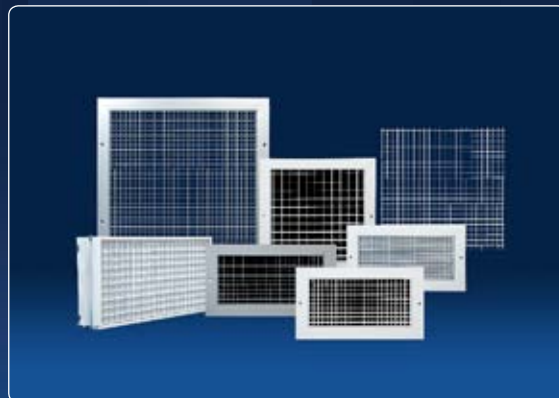

- Cube core available in 1/2 x 1/2 x 1/2; 1/2 x 1/2 x 1; or 1 x 1 x 1 inch grids
- Capable of transferring high volumes of air at minimum pressure requirements
- Often match appearance of luminaries
- Standard frame, U frame or no frame can be specified to meet your installation requirements
- Opposed blade damper available

Filter



- Ideal for improving indoor air quality or when air unit is inconveniently located
- Four mounting methods to meet your installation requirements
- Grille can be completely removed from mounting frame for cleaning when A, C, or D type mounting is specified
- Typically manufactured for 1-inch deep filter, but can be altered for 2 or 4 inch filter depths as well
- Filter to be provided by others and must be undersized by minimum of 5/16 inch

Industrial



- Durable design for industrial application where large air volumes are required
- Rugged all extruded aluminum construction
- 1 1/2 deep extruded blades are individually adjustable on 1 1/2 centers
- Blades can be specified to be gang-operated with handle
- Blades screwed firmly in place to hold position, with nylon bushing to provide scratch and rattle-free adjustment
- Opposed blade damper available

Louver



- Two-inch storm-proof or thin line louver
- Designed to prevent water penetration and provide maximum free area
- Provided with 1/2 x 1/2 galvanized bird screen
- Flange or duct frame available