

Bar Linear Removable Core Registers



Not suitable for floor use

DABLDR


- Removable core held in place with clips
- Fully extruded aluminum construction for a stylish appearance
- Fixed blades designed for long straight air throw
- Built-in Opposed Blade Damper with sliding operator
- Sections joined together for continuous appearance. When longer than 84", aligning pins are provided.
- Available on 1/2" increments as standard
- Custom sizes available but extra charge may apply
- Durable powdercoat painted finish

HOW TO ORDER

DABLDR_ - 00 - D 30 x 4 COLOR

Grid core	-G	Blade	-00,-01	Width & Height	White
No flange	-N		-15,-30		Silver
			-82,-84	Mounting	Mill or Brown
				A, B, C or D	

Do not leave space if option is not required

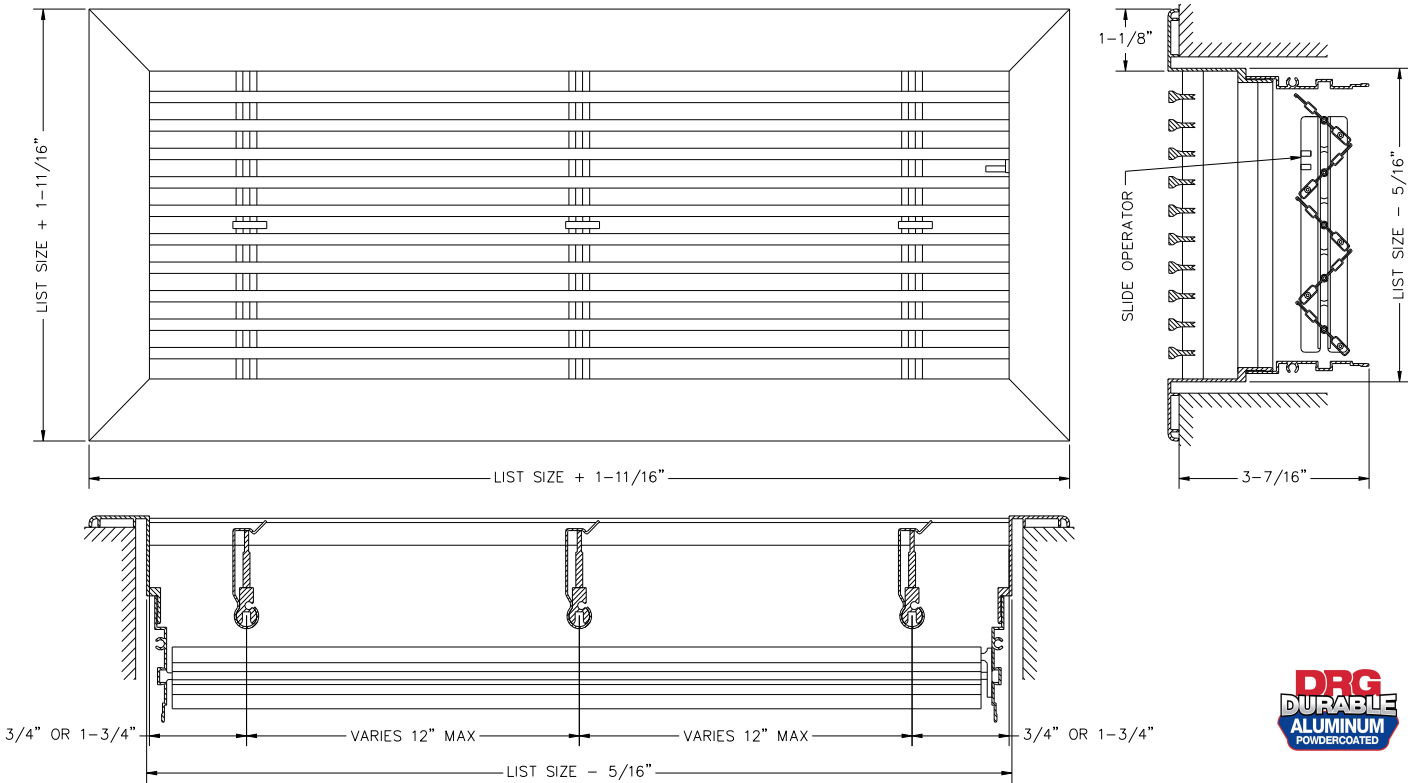

DESCRIPTION	DABLDR
FACE BLADES	Horizontal Fixed
REAR BLADES	n/a
DAMPER	Opposed Blade
MATERIAL	Aluminum
COLOR	White/Silver/Brown/Mill

JOB NAME: _____

LOCATION: _____

ARCHITECT: _____


ENGINEER: _____

CONTRACTOR: _____

Bar Linear Blade Options


-00-

0° 13/64" blades on 1/2" centers

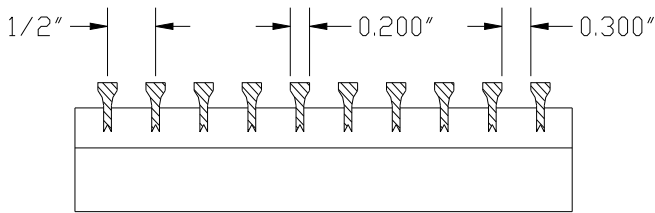


-01-

0° 1/4" blades on 1/2" centers

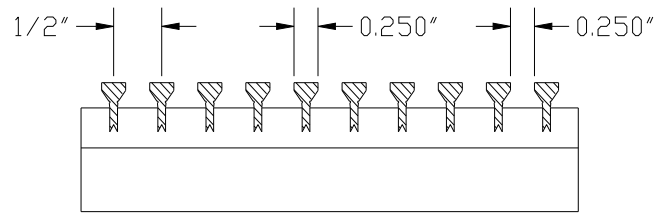


-15-

15° 13/64" blades on 1/2" centers

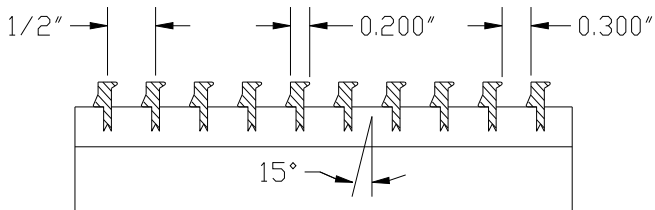


-30-

30° 13/64" blades on 1/2" centers

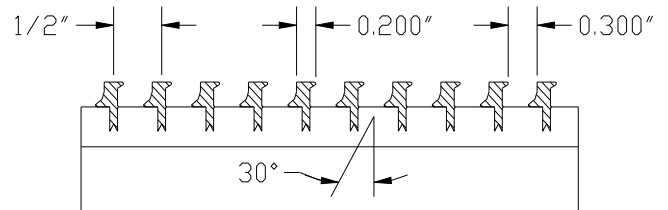


-82-

0° 1/8" blades on 1/2" centers

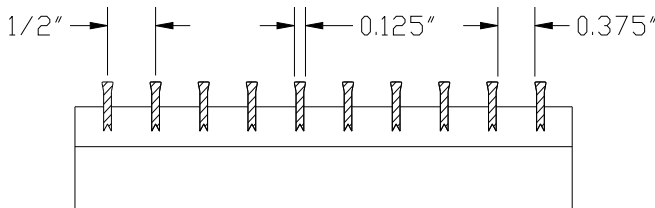

-84-

0° 1/8" blades on 1/4" centers

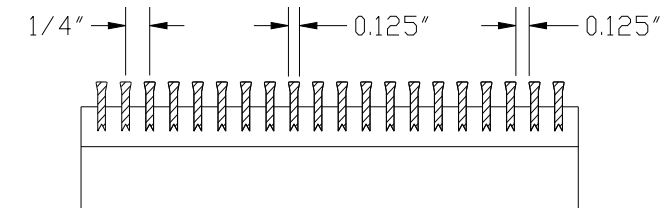


- Additional charges apply for the -84 core option

Bar Linear Mounting Options


**-A
SCREWS**

Color matched screws with counter-sunk screwholes.
Suitable for ceiling, wall, sill or floor installation.

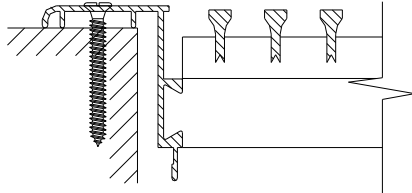


**-B
SPRING CLIPS**

Clips behind the flange keep grille snug in opening and are not visible from the face.
Only for floor and sill applications.
NOT suitable for wall or ceiling use.

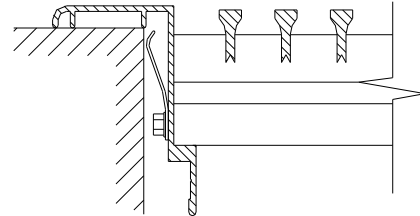


**-C
CONCEALED BRACKETS**

Grille gets fastened to duct-mounted brackets that are concealed behind the blades.
Suitable for ceiling, wall, sill or floor installation.

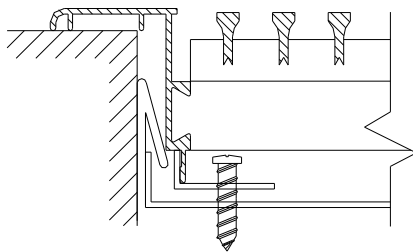

**-D
SIDEWALL SCREWHOLES**

Screw holes drilled at 45° on inner flange.
Only available with **-R Removable core.**
(Removable option not available for floor)
Suitable for ceiling, wall or sill installation.

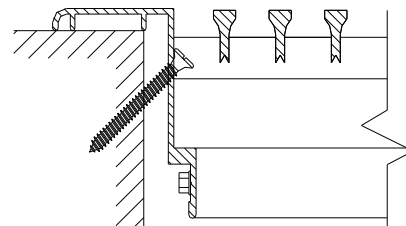

**-TB
NO MOUNTING OPTION**

Suitable for T-Bar lay-in ceiling & custom applications.
Account for the flange by ordering 2" under the T-Bar size.
i.e.: a 22" x 10" grille will have a 23-11/16" x 11-11/16" OD
and will fit a standard 2 ft x 1ft T-Bar opening

